


Description


- Can be used for left hand or right hand systems.
- The hinge has a special design on the portion where it comes in contact with the seal gasket in order to reduce the artificial tension in the system to improve the isolation.
- Thanks to the adjustable screw, hinge for stay arm can be adjusted left or right (L / R) by using a 4 mm allen wrench.
- The friction between the axel and the hinge is reduced due to the plastic bush. This way, the unaesthetic span steel will no longer appear on the frame.

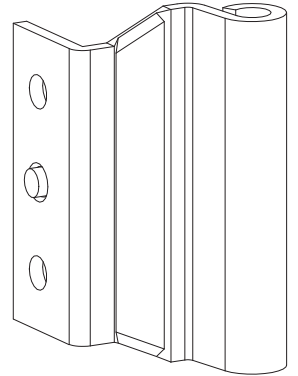

Material Specification


Body : Steel

Technical Drawing

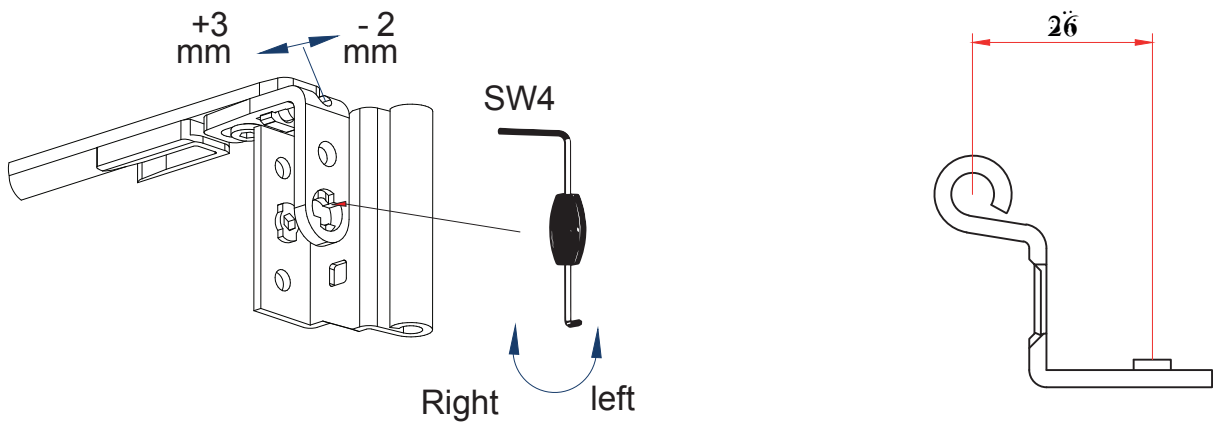

Hinge

PG	Code	
T1	T-10186-09-0-1	20



Covers

PG	Code	
T1	T-10185-11-0-*	100

