

Description

- Multipoint door locks has multiple locking points which simultaneously lock into place through the action of a continuous travel drive gear. This drive gear is usually activated by key turn.
- Locking is done by turning the key.
- Multipoint door lock series are key operated with roller.
- The latch is reversible. Easy to change on left or right.



Technical Data

Operation : Key
 Pz (mm) : 92
 Backset (mm) : 35
 Faceplate (mm) : 16

Material Specification

Case : Steel and industrial plastic
 Latch : Zinc acc EN 1743-2 / zinc plated
 Deadbolt : Zinc acc EN 1743-2 / zinc plated

Technical Drawing

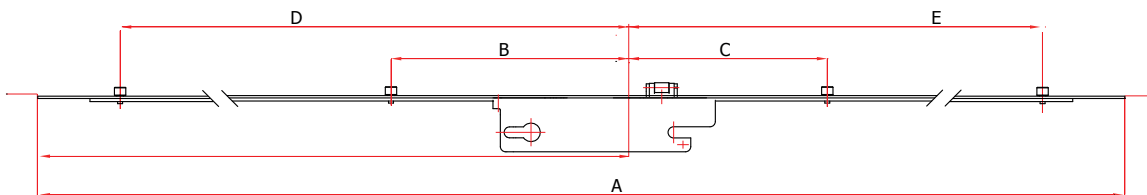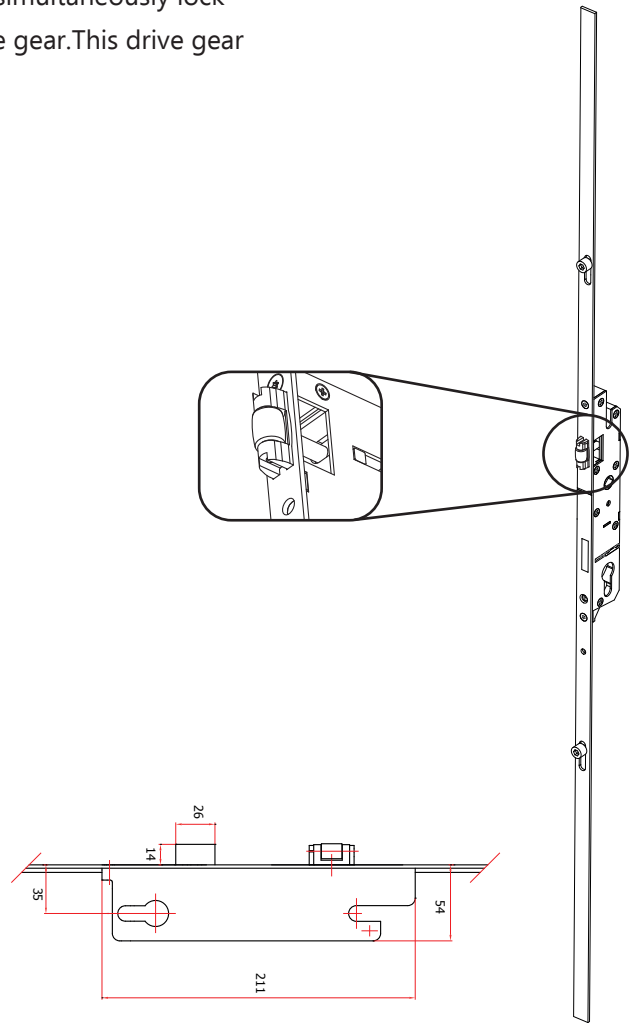

TGP Focus6 Lockable Door Gear, Key Operated, with roller, 35 / 92

PG	Code	A	B	C	D	E		
T3	T-30613-16-0-1	1600	299	-	805	623	3	10
T3	T-30613-18-0-1	1800	299	307	805	823	4	10
T3	T-30613-20-0-1	2000	395	311	868	885	4	10

PG	Code	Dimension		Description
T56	T-56000-10-0-1	100 mm	40/50	TGP Profile Cylinder, Brass, 6+6 Brass pins, 3 pcs brass computer keys, 1 pcs antidrill bar.
T56	T-56000-90-0-1	90 mm	42/38	
T56	T-56000-80-0-1	80 mm	35/35	

