

Description

- Multipoint door locks has multiple locking points which simultaneously lock into place through the action of a continuous travel drive gear. This drive gear is usually activated by lifting the door handle.
- Locking is done by turning the handle upwards after that turning the key. The handle goes back to horizontal position.
- Focus3 multipoint door lock series are with deadbolt.
- The latch is reversible. Easy to change on left or right.



Technical Data

Operation : Handle
 Pz (mm) : 85
 Backset (mm) : 35
 Faceplate (mm) : 16

Material Specification

Case : Steel and industrial plastic
 Latch : Zinc acc EN 1743-2 / zinc plated
 Deadbolt : Zinc acc EN 1743-2 / zinc plated
 Hook : Steel acc EN 10149

Technical Drawing

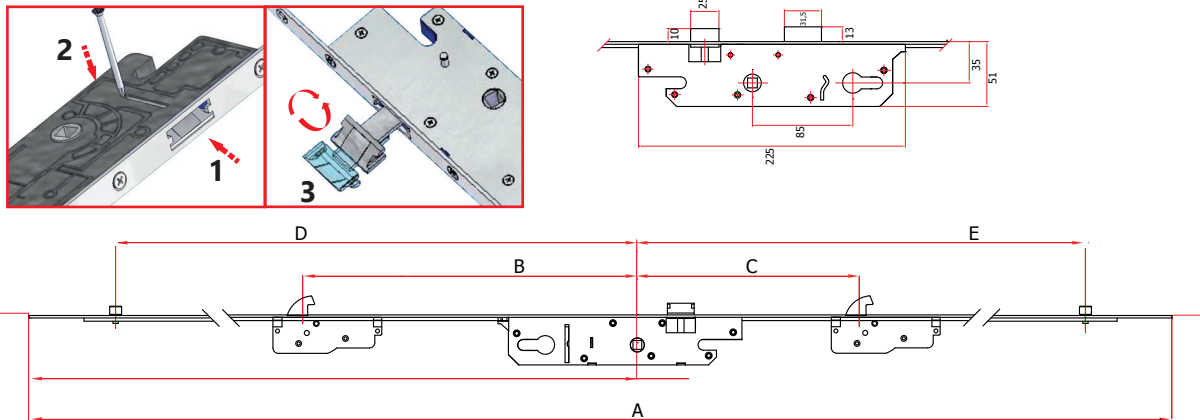

TGP Focus3 Lockable Door Gear, Handle Operated, with hook, 35 / 85

PG	Code	A	B	C	D	E		
T3	T-30011-18-0-1	1800	431	471	748	737	4	10
T3	T-30011-20-0-1	2000	431	471	748	737	4	10

Locking Plate for Hook

PG	Code	
T3	T-31005-09-0-1	100
T3	T-31005-13-0-1	100

PG	Code	Dimension	Description
T56	T-56000-10-0-1	100 mm 40/50	TGP Profile Cylinder, Brass, 6+6 Brass pins, 3 pcs brass computer keys, 1 pcs antidrill bar.
T56	T-56000-90-0-1	90 mm 42/38	
T56	T-56000-80-0-1	80 mm 35/35	

